

**STEEL | WOOD | CONCRETE SLAB (APPROXIMATELY 3-4"),
ACOUSTITECH LEAD 3.3, SUSPENDED CEILING WIRES AND CHANNELS |
DOUBLE GLUED DOWN**

Acoustic performance

AIIC: 52 to 56

ASTC: 58 to 62

ASSEMBLY DETAILS

STRUCTURE

Steel

ASSEMBLY COMPONENTS

Concrete slab (approximately 3-4"),
AcoustiTECH Lead 3.3, Suspended
ceiling wires and channels

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE


Adhesive AD-844 MS, Adhesive AD-316,
Adhesive AD-532+

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

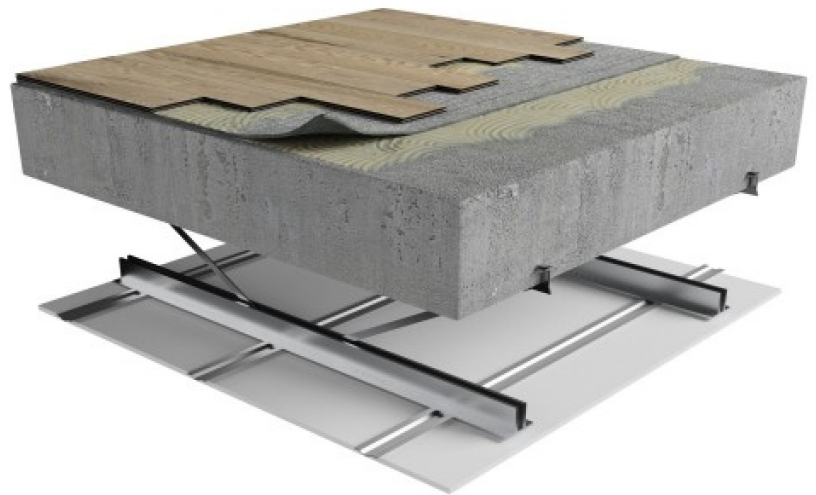

**ACOUSTITE
CH LEAD
3.3**



Plus de

**ADHESIVE
AD-844 MS**



Plus de
détails

**ADHESIVE
AD-316**



Plus de
détails

**ADHESIVE
AD-532+**



Plus de
détails

détails

www.acousti-tech.com